


Hefei Huayun Machinery Manufacturing Co., Ltd.

Peristaltic Pumps for 0.4 to 11.5 GPM at pressures up to 232 PSI



DIMENSIONS, mm (in.)	IHP20Z	IHP25Z	IHP32Z
A	10 (0.39)		
B	230 (9.05)	240 (9.45)	256 (10.08)
C	250 (8.84)	260 (10.24)	276 (10.87)
D	357 (14.05)	400 (15.75)	434 (17.09)
E	560 (22.04)	672 (26.45)	712 (28.03)
F	22.5 (0.88)	25 (0.98)	
G	185 (7.28)	235 (9.25)	275 (10.82)
H	230 (9.05)	285 (11.22)	325 (12.79)
I	302 (11.89)	395 (15.55)	478 (18.81)
J	426 (16.77)	513 (20.20)	575 (22.63)
L	78.5 (3.09)	85 (3.35)	87.5 (3.44)
M	204 (8.03)	270 (10.63)	332 (13.07)
Maximum pressure	174 PSI		232 PSI
Maximum Temperature	194°F		

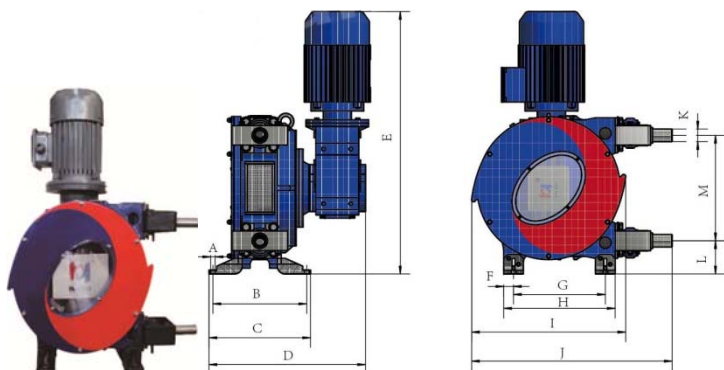

Continuous duty applications should operate at approximately ≤ 30 RPM

	IHP20Z	IHP25Z	IHP32Z
Hose \varnothing , mm (in.)	20 (¾)	25 (1)	32 (1¼)
Max. continuous flow (GPM)	1.2	2.7	5.7
Max. intermittent flow (GPM)	2.4	5.3	11.5

Factory address: No.25, Jinhai Road, Shuangfeng Economic & Development district, Hefei, Anhui, CN
 Sales office: Floor 13th, Meidi Yangguang mansion, Jinhai road, Hefei City
<http://www.hospump.com> (FDPP: USA office <http://www.innovativepumps.com>)

